

BTX2 PRO S/-LR

Bluetooth™

POCKET GUIDE




Frequency: 2.4GHz - Max power: 100mW

ENGLISH

MIDLAND®

ON/OFF

CONTROLS DESCRIPTION - LEGENDA

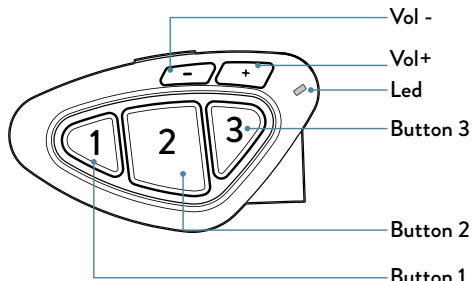

LEGENDA

OPERATION



Press X seconds



Press x times

AUDIO FEEDBACK



Sound alert



Musical sound alert

VISUAL FEEDBACK



Blue led blinking



Red led blinking



Red/blue led blinking



Purple led




Steady blue led



Steady red led

POWER ON



Press 3 seconds



Blinking



Musical sound alert




Operating mode status



Battery status

POWER OFF



Press 3 seconds at the same time



Blinking



Musical sound alert

PAIRING


PAIRING DESCRIPTION

Stereo background pairing (in background to the intercom)

Ex.: phone with navigator-TFT-GPS

Main pairing stereo (stops intercom)

Ex.: phone-TFT

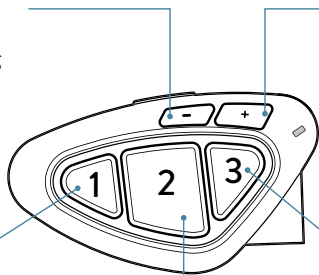

CONFERENCE

Pairing to:

- Midland unit
- Different brand unit (Universal Intercom)



Pairing to a Midland unit (passenger)




CONFERENCE

Pairing to:

- Midland unit
- Different brand unit (Universal Intercom)

TO ENTER SETUP MODE

Status: Power off




Press 7 seconds



Lights up

TO EXIT SETUP MODE/INTERRUPT THE PAIRING

Status: Setup mode and during pairing




Press twice

PAIRING

TO RESET THE PAIRING

Status: Setup mode



Press 3 seconds at the same time




Lights up



Steady led

PAIRING TO A MIDLAND UNIT

Status: Both units in setup mode



Press 3 seconds (start procedure on both units at the same time)



Blinking



Steady 1 second,
pairing successful




Steady,
pairing complete

Note: To pair other Midland units, follow the same procedure but press buttons 1 or 3.

PAIRING TO A DIFFERENT BRAND UNIT

Status: Setup mode

1st Unit



Press 7 seconds (start procedure on both units at the same time)



Blinking fast (keep pressed)



Blinking slowly (release)



Steady,
pairing complete

2nd Unit




Follow the “phone” pairing procedure

Note: to pair another Universal Intercom, follow the same procedure but press Button 3.

PAIRING

PAIRING 4 UNITS IN CONFERENCE


Status: Setup mode

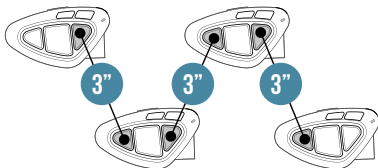

Note: the Conference mode allows the simultaneous communication amongst units. All units must be paired in a “chain” configuration: the Backwards button of the first unit must be paired to the Forwards button of the second unit and so on. For a detailed description of the function go to paragraph “Conference” of the complete user manual.

PAIRING TO A PHONE/GPS

Status: Setup mode



Press 3 seconds



Blinking



Select device on the phone



Steady 1 second,
pairing successful

Note: the unit paired to Vol- is in background to the intercom. To pair the unit and interrupt the intercom, repeat the procedure but press Vol+.

OPERATING MODES

- A. Intercom mode:** to talk to another unit.
- B. Phone mode:** phone calls or manage music.
- C. FM radio mode*:** to listen to, seek and store FM radio stations.

Note: *Intercom and phone modes are possible only when the units are paired.*

TO CHANGE THE OPERATING MODE


Status: Power on



Press 3 seconds




Operating mode status

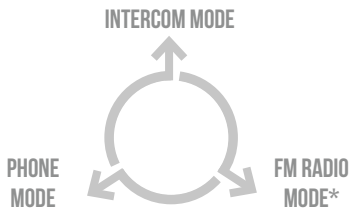

SHORTCUT - Remind - Operating mode status:
Press Vol-/Vol+ at the same time.


A. INTERCOM MODE

PAIRING DESCRIPTION

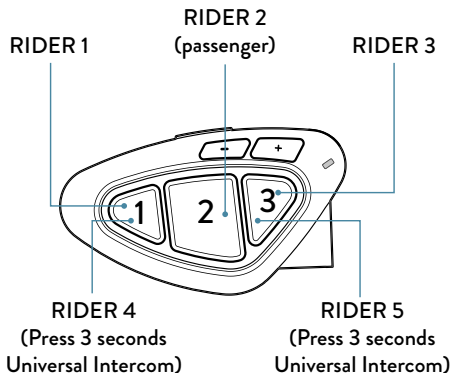

TO OPEN/CLOSE INTERCOM MANUALLY

Status: Intercom mode



Press once



Sound alert



Blinking

Note: *if you have paired another unit, push buttons 1 or 3 to open/close the intercom.*

OPERATING MODES

A. INTERCOM MODE

TO OPEN/CLOSE INTERCOM USING THE VOICE

Status: All modes



Say "Hello"



Sound alert



Blinking



Mute for 40 sec.,
intercom is closed



Sound alert

Note: the voice activation is possible only if the unit is paired to button 2.

ENABLING/DISABLING VOX

Status: All modes



Press 7 seconds



Sound alert

TO OPEN/CLOSE UNIVERSAL INTERCOM

Status: Intercom mode




Press 3 seconds
opens
Universal intercom



Blinking



Sound alert



Press once
to close
Universal Intercom

Note: to open/close the audio from a different brand unit, use the voice dial command (for some models you have to send the command twice)

Note: if you have another device as Universal Intercom, follow the same procedure but press button 3.


SHORTCUT - To open the intercom while listening to/sharing music in phone mode: press button 2 twice.

OPERATING MODES

A. INTERCOM MODE

TO ENABLE/DISABLE CONFERENCE

Status: All modes



Press 3 seconds at the same time **enables/disables** Conference




Sound alert




Conference status

TO OPEN/CLOSE CONFERENCE


Status: Conference



Press once **opens/closes** Conference to the unit paired to **button 1**



Press once **opens** Conference to **all units paired**



Press once **opens/closes** Conference to unit paired to **button 3**

Note: The device paired to Vol+ is temporary disconnected, while the one paired to Vol- is still active.


OPERATING MODES

B. PHONE MODE

CONTROLS DESCRIPTIONS

(Phone paired on Vol+)

- Make a call
- Answer a call
- End a call
- Reject a call
- Song forward

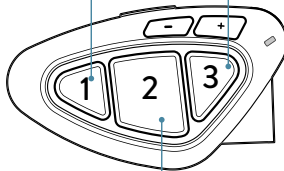


(Phone paired on Vol-)

- Make a call
- Answer a call
- End a call
- Reject a call
- Song backward

Play/pause

TO MAKE A CALL

Status: phone mode



Press once



Voice assistant
(Google assistant,
Siri)




Give instructions
to your assistant




Call starts

ANSWER/END A CALL



Press once

REJECT A CALL



Press 3 seconds

Note: if your phone is paired to Volt+, press button 1.

OPERATING MODES


B. PHONE MODE

MUSIC

Status: phone mode




Select a music APP



Press once
Play/Pause



Press once
Song forward




①
Press once
Song backward

③"
Press 3 seconds
activates/interrupts
music sharing with
passenger (Music
Share)

SHORTCUT - Music Play/pause in Intercom/FM radio mode: press twice button 2.

REMOTE MUSIC CONTROL VOL+/VOL-

Status: all modes



Press 3 seconds



Remote control
Vol+/Vol-

Note: if you have paired two multi-media devices, to control the music of the device paired on Vol-, you have to set the music control from Vol-; while to control the music of the device paired on Vol+, set the music control from Vol+.

PUBLIC/PRIVATE MODE

Status: all modes



Press 3 seconds



Private
Public


If Public mode is enabled, you can share in intercom mode the information coming from the unit paired to Vol-.
Phone calls are always private.

OPERATING MODES

C. FM RADIO MODE*

CONTROLS DESCRIPTION

Radio station up
Memory up

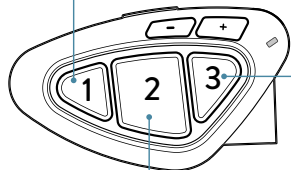

Radio station down
Memory down


FM radio On/Off

FM RADIO

Status: FM Radio mode




Press once
On/Off



Radio station up

3"
Memory up



Radio station down

3"
Memory down

*



Only for versions supplied
with FM Radio.

For more info visit:

<https://support.midlandeuropa.com/>

Select a product and:

Watch **tutorial video**

Download **software**

Read complete **manual instruction**

**Download Midland Connect from
App Store or Google Play**

Midland World



Prodotto o importato da/Produced or imported by: **Midland Europe Srl** Via. R. Sevardi 7, 42124 Reggio Emilia - Italy. Prima dell'uso leggere attentamente le istruzioni - Read the instructions carefully before installation and use. Vertrieb durch: **Alan Electronics GmbH** Daimlerstraße 1g - D 63303 Dreieich Deutschland. Vor Benutzung Bedienungsanleitung beachten. Importado por: **Midland Iberia, SA** C/Cobalt, 48 - 08940 Cornellà de Llobregat, Barcelona - España. Antes de utilizar, lea atentamente el manual de uso. Distribué par: **Alan France S.A.R.L.** - 14 Draille des Tribales, Bât D, Lot n°6, 13127 Vitrolles - France. Avant l'utilisation, lire les instructions.

 **MIDLAND®**

The Midland logo consists of a stylized mountain range or 'M' shape made of three triangles, followed by the word 'MIDLAND' in a bold, sans-serif font with a registered trademark symbol.