



POCKET GUIDE

LS2




LS2 INTERCOM

SPECTRUM **EVO**

Powered by **MIDLAND**

ON/OFF

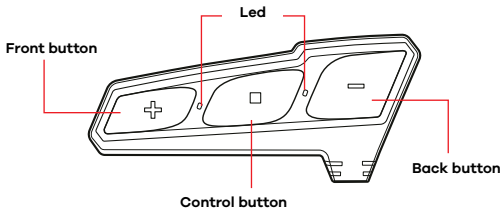


SWITCH ON

Status: UNIT OFF

SWITCH OFF

Status: UNIT ON



3"

Press together for
3 seconds

3"

Press together for
3 seconds



Flashes



Flashes




Power on



Power off

PAIRING

Pairing to: LS2 intercom, Obi (Midland, Cardo) and other brands



Pairing to: phone, TFT, GPS, Action camera


Pairing to: LS2 intercom, Obi (Midland, Cardo) and other brands

Pairing to: LS2 intercom, Obi (Midland, Cardo) and other brands

Note: you can pair in total up to 3 intercom devices (LS2 and/or other brands).
The pairing on one button overwrites the previous one.

PHONE/GPS/TFT/ACTION CAMERA PAIRING

Status: UNIT OFF



7"

Press for 7 seconds



Pairing phone



Flashes



Select Spectrum on phone, GPS, TFT or action camera




Pairing successful

Note: you can pair only one device among a phone, GPS, TFT or action camera

PAIRING

PAIRING WITH LS2/OBI INTERCOMS OR COMPATIBLE MODELS

Status: UNIT ON



LS2 or OBI (Midland & Cardo
or compatible models)

7"

Press any key for 7 seconds



Flashes

Follow the **intercom pairing** procedure
(See instruction of the device)



Pairing Intercom

Pairing successful


Note: By following the same procedure, it is possible to pair two further devices to the Front or Back buttons.

Note: try this kind of pairing to verify whether your device is an OBI type or a compatible model; in case this procedure does not succeed, then follow the Universal Intercom pairing procedure.

PAIRING

UNIVERSAL INTERCOM PAIRING (NON-OBI OR NON-COMPATIBLE)

Status: UNIT ON



7"

Press any key for 7 seconds



Flashes

Follow the **phone pairing** procedure
(See instruction of the device)




Pairing Intercom

Pairing successful

Note: By following the same procedure, it is possible to pair two further devices to the Control or Back buttons.

RESET BLUETOOTH PAIRINGS

Status: UNIT ON



9"

Press all the buttons together
for 9 seconds




Flashes


VOLUME - LANGUAGE

VOLUME ADJUSTMENT

Status: While listening to an audio source (music, phone,...)




Keep pressed to increase
the volume



Keep pressed to decrease
the volume

CHANGE LANGUAGE

Status: UNIT ON



9"

Keep pressed for more than
9 seconds




"Battery status" in the various
languages. Release the buttons
as soon as you hear the
announcement in the desired
language.

INTERCOM

OPEN/CLOSE INTERCOM

Status: UNIT ON and already paired



Press once the button used for LS2/Obi pairing



Beep




Flashes

Note: to communicate with the other intercom paired to Front/Back keys, repeat the procedure on the correspondent key.

OPEN INTERCOM WITH VOX

Status: unit on and paired with the Control button



Say **"hey Spectrum"** to open Intercom



Beep




Flashes

Note: the voice activation is possible only with a unit paired with the Control button.

INTERCOM

OPEN/CLOSE UNIVERSAL INTERCOM

Status: UNIT ON and already paired



Press once the button used for the Universal Intercom pairing



Beep



Flashes


Note: to open/close the audio from a different brand device, use the voice call command (for some models, it is required to send the voice call twice).

Note: to communicate with the other intercom paired to Control/Back keys, repeat the procedure on the correspondent buttons.

PHONE

VOICE DIAL (ACTIVATE CALL, NAVIGATOR, MUSIC)

Status: UNIT ON and paired to a phone



Press twice or say **"hey Google"** or **"hey Siri"** to open the voice assistant



Beep beep



Give instructions



Flashes




Call, Navigator, Music

PHONE


CALLS

Status: UNIT ON and paired to a phone with an incoming or ongoing call


ANSWER



END



REJECT



Press once any key or say **"hey Spectrum"** to answer a call



Press once any key




Press the Control button for 3 seconds

Note: if the Automatic Response is enabled, the intercom device automatically answers after 8 seconds.

TO ENABLE/DISABLE AUTOMATIC RESPONSE

Status: UNIT OFF



Press 9 seconds



Enable



Flashes




MUSIC

PLAY/PAUSE

Status: UNIT ON and paired to a phone



Select Music App



2"

Press 2 seconds
Play/Pause



Press twice
Next track



Press twice
Previous track


MUSIC SHARE WITH PASSENGER

Status: UNIT ON and paired to a phone



Select Music App

Open Intercom



2"

Press 2 seconds



Music Share

Note: To stop the Music Share press the Control button for 2 seconds.

Note: music can be shared only with a LS2 SPECTRUM/EVO device.

Frequency (GHz)

Max power (mW)

2.402 - 2.480

100



To configure and manage LS2
SPECTRUM EVO and update
the firmware, download Midland
Connect from App Store or Google
Play.



Scan the QR code to access the support page, update the
firmware and find all info about LS2 SPECTRUM EVO, including
video tutorial and installation.



MORE INFO



Produced or imported by: **MIDLAND EUROPE S.R.L.**
Via R. Sevardi 7, 42124 Reggio Emilia, Italy
Distributed by: **LS2 MOTOGEAR EUROPE S.L.U.**
C/Colom 372, 08223 Terrassa, Barcelona, Spain