

POCKET GUIDE

**UP TO
Q21 VERSION**

BT MINI

PREMIUM ESSENTIAL INTERCOM


 **ENGLISH**



MIDLAND®


ON/OFF

KEY DESCRIPTION

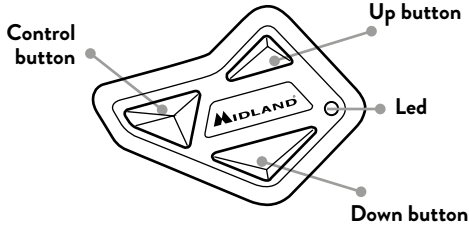

PAIRINGS

PAIRINGS DESCRIPTION

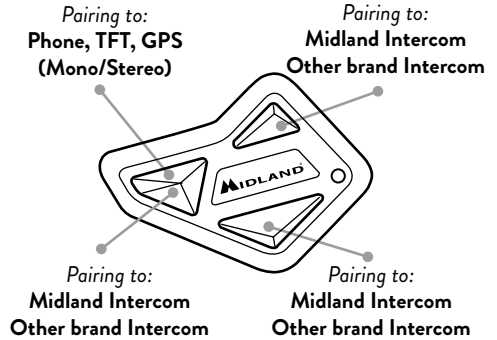

Note: you can pair in total up to 3 intercom devices (Midland and/or other brands). The pairing on one button overwrites the previous one.

SWITCH ON

Press for 3 seconds

- Flashes
- Power on

3"

Attention: upon turning on or off, pressing the two button longer than the indicated time could reset the pairings.

SWITCH OFF

Press together for 3 seconds

- Flashes
- Power off

3"

PHONE, TFT, GPS PAIRING







STATUS: UNIT OFF

Press for 7 seconds




- Pairing phone
- Flashes
- Select BT Mini on phone, GPS or TFT
- Pairing successful





7"

PAIRINGS

MIDLAND INTERCOM PAIRING	
STATUS: UNIT ON	
1st 	2nd 
Press for 7 seconds	Press for 7 seconds
 Flashes	 Flashes
 Pairing intercom	 Pairing intercom
Pairing successful	

Note: By following the same procedure, it is possible to pair two further devices to the **Up** or **Down** buttons.

RESET BLUETOOTH PAIRINGS	
STATUS: UNIT ON	
	Press together for 7 seconds
 Power off	
 Confirmation (3 sec.)	


OTHER BRAND INTERCOM PAIRING (UNIVERSAL INTERCOM)	
STATUS: UNIT ON	
	
Press for 7 seconds	
 Flashes	Use the phone pairing procedure
 Intercom pairing	
Pairing successful	

Note: By following the same procedure, it is possible to pair two further devices to the **Up** or **Control** buttons.


Note: you can pair in total up to 3 intercom devices (Midland and/or other brands). The pairing on one button overwrites the previous one.

VOLUME ADJUSTMENT

STATUS: WHILE LISTENING TO AN AUDIO SOURCE (INTERCOM, MUSIC, PHONE CALL)




Keep pressed to increase the volume



Keep pressed to decrease the volume

CHANGE LANGUAGE

STATUS: UNIT ON



Keep pressed for more than 12 seconds




“Battery status” in the various languages. Release the button as soon as you hear the announcement in the desired language

INTERCOM

TO OPEN/CLOSE INTERCOM MANUALLY

STATUS: UNIT ON AND ALREADY PAIRED



Press once



Beep




Flashes

Note: to communicate with the other intercom paired to Up/Down keys, repeat the procedure on the correspondent buttons.

TO OPEN/CLOSE UNIVERSAL INTERCOM

STATUS: UNIT ON AND ALREADY PAIRED



Press once



Beep



Flashes

Note: to open/close the audio with a different brand device, use the voice call command (for some models, it is required to send the voice call twice).


Note: to communicate with the other intercom paired to Up/Control keys, repeat the procedure on the correspondent buttons.

PHONE

TO MAKE A CALL

STATUS: UNIT ON AND PAIRED TO A PHONE

Press twice



Voice Assistance response (Google assistant, Siri)



Give instructions




Flashes



Call

TO ENABLE THE AUTOMATIC RESPONSE

STATUS: UNIT ON



press 3''




Enable




Flashes

TO ANSWER/END/REJECT A CALL




Press once to answer/end a call



Press for 3 seconds to reject a call

TO DISABLE THE AUTOMATIC RESPONSE

STATUS: UNIT ON



Press 3''



Disable



Flashes

Note: if the Automatic Response is enabled, the phone automatically answers after 8 seconds.


MUSIC

PLAY/PAUSE


STATUS: UNIT ON AND PAIRED TO A PHONE




Select Music App



Keep pressed for 2 seconds
Play/Pause



Press twice
Next track



Press twice
Previous track

Frequency (GHz)	Max power (mW)
2.402 - 2.480	100

For info visit:

<https://support.midlandeuropa.com/>

Select a product and Watch
video tutorials - Download software

Midland World



To listen to the web radio download Midland
Connect from App Store or Google Play

